

RTP COLOR • CONDUCTIVE • FILM/SHEET • FLAME RETARDANT
STRUCTURAL • THERMOPLASTIC ELASTOMERS • WEAR

Everything you need to know about TPEs

Brian Gumbko
TPE Market Manager

rtpcompany.com • rtp@rtpcompany.com

AP ESP Hueforia Wiman

RTP TPE DIVISION

AGENDA

- Establish a Definition
- Understanding how TPEs work
- TPE Types
- RTP Company Product offering
 - Additive Capability
 - Styrenic Based TPEs
 - TPV Alloys
 - Bondable Technology



GOALS

- A basic understanding of various TPEs
- Relate this knowledge to the RTP Company TPE product line

RTP DEFINITION

THERMOPLASTIC ELASTOMER

"...Having the property of softening or fusing when heated and of hardening again when cooled..."

"...Any of various elastic substances resembling rubber..."

Int'l Inst. of Synthetic Rubber Producers (IISRP) definition:

"Polymers, polymer blends or compounds which, above their melt temperatures, exhibit thermoplastic character that enables them to be shaped into fabricated articles and which, within their design temperature range, possess elastomeric behavior without cross-linking during fabrication. This process is reversible and the product can be reprocessed and remolded."

RTP WHAT IS TPE

A diverse family of rubber like materials that, unlike conventional vulcanized rubber, can be processed and recycled like thermoplastic materials.

Thermoset



Thermoplastic



RTP HOW TPES WORK

TPEs are composed of **hard** and **soft** domains; they are **multiphase** materials in their solid state.


Hard phase contributes "plastic" properties such as:

- High-temperature performance
- Thermoplastic process-ability
- Tensile strength
- Tear strength

Soft phase contributes "elastomeric" properties:


- Low-temperature performance
- Hardness
- Flexibility
- Compression & tension set

RTP BUT WHY ARE TPES RUBBERY?




The design temperature range of a TPE is bounded by the glass transition temperature of the rubbery phase and the glass transition or melt temperature of the hard phase.

RTP HOW TPE'S WORK

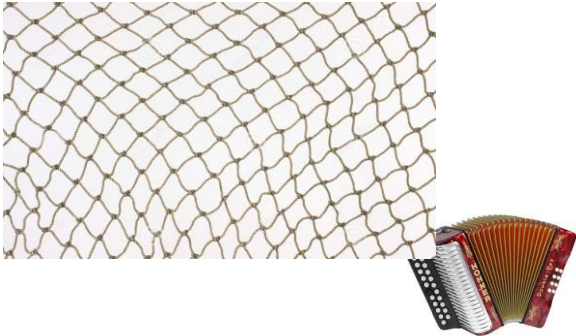


RTP SO, HOW CAN TPEs BE MELT PROCESSABLE?




By raising the temperature of the TPE above the glass transition or melting temperature of the **plastic phase**.

RTP SO, HOW CAN TPEs BE MELT PROCESSABLE?

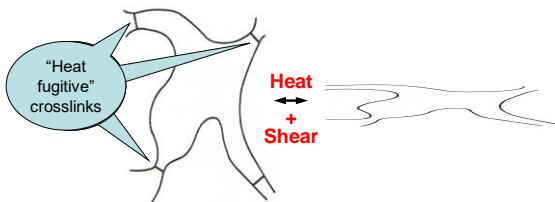


And applying shear forces typical of thermoplastic processes.

RTP UNLIKE THERMOSET RUBBER...

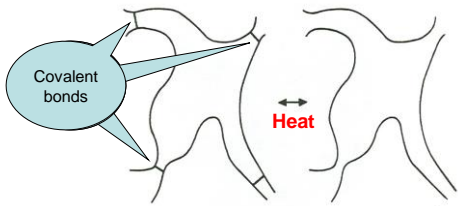


By comparison, thermoset rubbers (TSRs) are **single phase** materials with **non-reversible** chemical (covalent) bond cross-links.

RTP UNLIKE THERMOSET RUBBER...

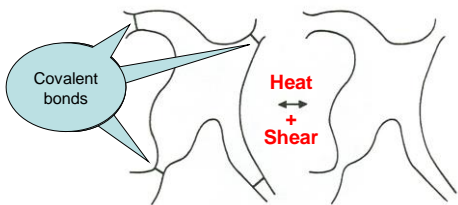


And are unaffected by shear forces.

RTP UNLIKE THERMOSET RUBBER...

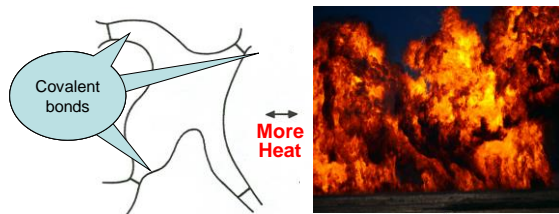

Or increasing heat...

RTP LINEAGE (ALPHABET SOUP)

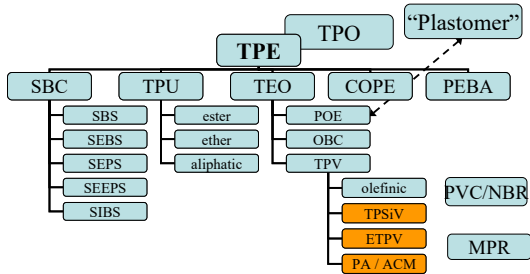

RTP NEAT POLYMER VS COMPOUND


NEAT POLYMER
Created in a reactor, polymerizing thermoplastics chemically from feedstock



COMPOUND
Using a mechanical mixing process to improve one or more neat polymers



RTP LINEAGE (ALPHABET SOUP)

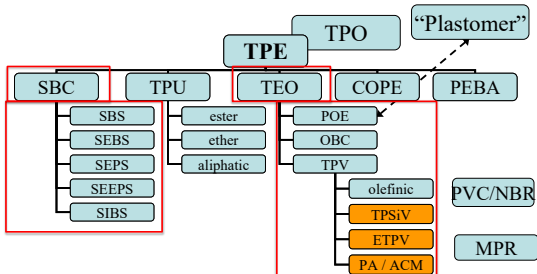


Most Commonly seen as compounds

RTP CLASSIFICATION & NOMENCLATURE

- Performance (heat & oil resistance following ASTM, SAE, etc.)
- Chemistry (styrenic, olefinic, urethane, etc.)
- Structure
 - Block copolymers
 - Blends & alloys
 - Dynamic vulcanizates

RTP BLOCK COPOLYMERS - MECHANISM

Block copolymer based TPEs are made of polymers that have both hard (semi-crystalline or glassy) blocks and soft (amorphous) blocks along the backbone.



In the bulk, as they cool from the melt, the hard blocks will coalesce into crystalline or glassy domains creating physical crosslinks.

The soft blocks are left to form amorphous rubbery domains that provide the elastomeric bridges between the crystalline domains.

RTP BLOCK COPOLYMERS - EXAMPLES

- Styrenic block copolymers "SBC"
- SBS, SEBS, SIS, SIBS, SEEPS (neat rubber)
 - Rarely used in their neat form
- Polyolefin elastomer "POE"
- Thermoplastic urethane "TPU"
- Copolyether-ester "COPE"
- Polyether-block-amide "COPA" or "PEBA"

RTP BLENDS & ALLOYS - EXAMPLES

Styrenic block copolymers "SBC"

- SBS, SEBS, SIS, SIBS, SEEPS → RTP 2700 S Series
- Most frequently compounded with PP, PE, or POE

Bondable TPES


- Polabond™
- Nylabond™

RTP FOCUS – SBC BASED TPES

COMPOSITION	DESIGN FLEXIBILITY
<p>OIL (white mineral, other)</p> <p>SBC POLYMER(S) (type, MW, and structure)</p> <p>FILLER (CaCO₃, talc, none)</p> <p>POLYPROPYLENE (lots of choices)</p> <p>Stabs, pigments, etc</p>	<p>Hardness – Gels (Shore 000) to 50D</p> <p>Viscosity – Extrusion to ultra-high flow</p> <p>Clarity – Opaque to water clear</p> <p>Properties – Tailored elasticity, strength</p> <p>Feel – Super grippy to dry</p> <p>Fillers – Throw in the kitchen sink</p>
STRENGTHS	LIMITATIONS
<p>Elasticity– Highly elastic to "dead"</p> <p>Versatility– Broad range of customizations</p> <p>Low temp and RT – Great CS and flexibility</p> <p>Cost– General purpose to boutique compounds</p> <p>Aesthetics– Excellent moldability, consistency</p> <p>Colorability– Very bright colors possible</p> <p>Bond to PP</p>	<p>Oil resistance– High affinity for absorption</p> <p>High Temp– Max CUT ~100C</p> <p>High Temp #2– Properties drop off as temp ↑</p> <p>Reputation– A few bad apples . . .</p> <p>Balance – Formulations flexibility is capped by inverse requirements – no free lunch</p>


RTP DYNAMIC VULCANIZATES - MORPHOLOGY

Simple melt-mixing



Coarse morphology - TPO

Dynamic vulcanization




Fine morphology - TPV

RTP FOCUS – TPVs

COMPOSITION	DESIGN FLEXIBILITY
<p>EPDM RUBBER (non-vulcanized bale)</p> <p>POLYPROPYLENE (usually GP grades)</p> <p>FILLER (CaCO3 or talc, low %)</p> <p>CURE PACKAGE (phenolic, peroxide, etc)</p> <p>Oil (generally low % add)</p> <p>Stabs, pigments, etc</p>	<p>ALLOYS</p> <p>Hardness 35A to 50D</p> <p>Viscosity Shear dependent flow</p> <p>Clarity – Opaque, nat color vs cure pkg</p> <p>Properties – Driven by hardness</p> <p>Feel – Most “rubber-like” feel</p> <p>Fillers – Crosslinked EPDM limits filler</p>
STRENGTHS	LIMITATIONS
<p>“Industrial” – Higher temp property retention</p> <p>Long term sealability (think auto)</p> <p>Great inherent UV stability</p> <p>Chemical and oil resistance</p> <p>Rubber-like – Most similar TPE to rubber</p> <p>Commoditized – Standard products and stocks</p> <p>Bond to PP</p>	<p>Customization – Technology and mfg limited</p> <p>Aesthetics – Shear sensitivity and gate defects</p> <p>RM flexibility – TPV does not drive inputs</p> <p>Color – Opaque natural, cure technology driven</p> <p>Regulatory vs Cost – Control capable, but “true” TPV has major cost implications</p>


RTP LINEAGE (ALPHABET SOUP)

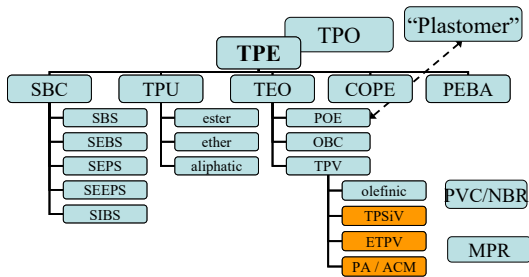

RTP TPE DESIGN FLEXIBILITY

Design Flexibility is a key component in leveraging the value of TPE's

Mass Reduction



Complex Geometries



Multi-Material Design



RTP TPE ≠ RUBBER

Keep in mind:


This is a broadbrush of many (very) different technologies that make up generic "TPE", relative to many (very) different technologies making up thermoset elastomers.

PROS	CONS
<ul style="list-style-type: none"> • Recyclable • Mass reduction • Manufacturing cost • Design flexibility 	<ul style="list-style-type: none"> • High Temp performance • Material cost • Elastomeric properties • No in-house compounding


TPEs are not a one-to-one replacement for Thermoset Elastomers

Proper material selection is highly dependent on the application requirements, design, and ability to take advantage of the strengths inherent to TPE or Thermoset Elastomers

RTP RELATIVE VALUE OF TPEs

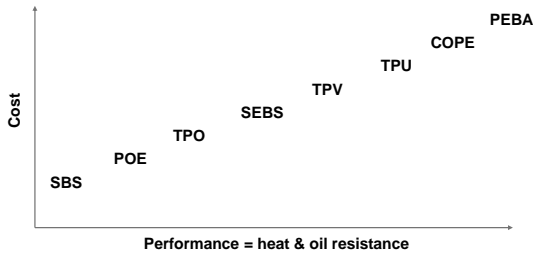


RTP RELATIVE VALUE OF TPE'S

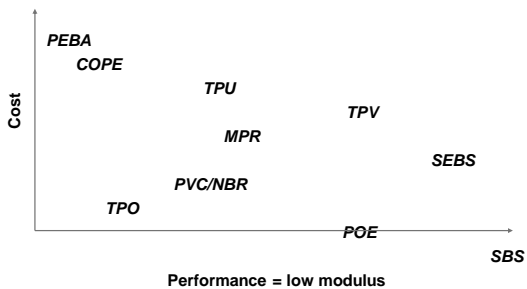


RTP THE PROBLEM WITH HARDNESS

TPE Strength and Hardness Comparison

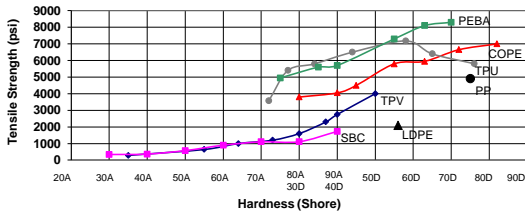

RTP THE PROBLEM WITH HARDNESS

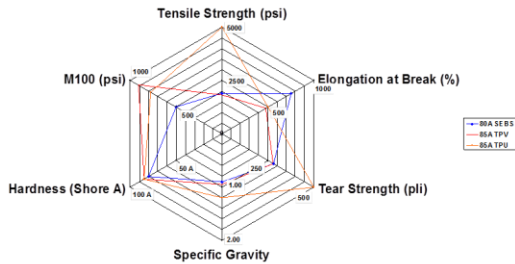

RTP WHY RTP COMPANY?

RTP Company has been built on several basic principles:

- Independent, Value Added Custom Compounding
- Incorporating Specialty Additives into a Wide Variety of Base Resins
- Very Highly Focused on (and invested in) R&D, Technology, and Engineering

SBS • POE • TES • SBC • TPV • TPU • COPE • PEBA

TPE compounding requires the exact same approach – Only different?

- Mix R&D / Engineering capability with ability to supply "volume" compounds
- Standard – Compounds common to the market
- TPE Alloys – Combining neat technologies to optimize performance
- Specialties – Incorporating RTP Company additive expertise

RTP STYRENIC BASED TPEs

RTP 2700 S & 2740S Standard Products

- **RTP 2700 S Series - 30A to 80A unfilled**
 - Translucent to clear, low gravity, excellent elasticity
 - Medical and FDA compliant grades available (MD and Z)
- **RTP 2740 S- HF Series- 30A to 90A filled SBC**
 - Opaque, higher gravity, FDA compliant grades available

- Attributes**
- *Highly elastic*
 - *Highly customizable*
 - *Design flexibility*
 - *Broad cost spectrum*
 - *Great RT compression set*

2799 SX Design Flexibility

- Water clear
- Increased elasticity
- Low hardness + strength
- EU food contact compliant
- Processing tweaks
- Haptics (touchy-feely)



RTP VULCANIZATE BASED TPEs

Permaprene™ 2800 B & 2840 B Standard Products

- **Permaprene™ 2800 B Series- 45A to 50D TPV Products**
 - HF Grades preferred for cost & appearance improvement
 - FDA compliant grades available in non-HF only
- **Permaprene™ 2840 B Series- 55A to 90A TPV VAVE Option**
 - Higher Gravity, Lower temp, good extrusion, smoother feel

- Attributes**
- *Broad temp range*
 - *Improved chem resistance*
 - *Easily colorable*
 - *Broad cost spectrum*
 - *Great RT compression set*

2899 X Design Flexibility

- Targeted viscosity
- Targeted properties
- Improved UV (good to great)
- Application tailoring
- Splitting the difference
- Haptics (touchy-feely)



RTP NYLABOND™

Nylabond™ 6091 Series: Nylon Bondable TPVs

- Formulated specifically for melt bonding to Nylon 6 and 6/6
- Available in durometer levels of 55A to 85A
- TPV based product based on Santoprene® technology
- Market leading technology, unequalled property set
- Significant value in automotive – temp & chem resistance

- COMPETITION**
ALL SEBS BASED
- Tekbond 1158A&C, 1372A [Teknor Apex]
 - Versaflex OM-6059, OM-6200 [GLS]
 - Thermolast K CO PA, CO NY [Kraiburg]
 - Dryflex [Hexpol TPEs]

Nylabond™ 6092 - new Nylon bondable TPE Automotive Specifications

- GMW 15817 Type 1
- GMW 15817 Type 2
- MSAR 100 AAN
- MSAR 100 BAN
- MSAR 100 CAN
- VW 50123 Conformance
- Daimler DBL5562-30 Conformance
- SAE J200 callouts
- ASTM D4000 callouts



RTP POLABOND™

Polabond 6042 Series: ABS, PC, and PC/ABS Bondable SEBS Alloys

- Excellent Bonding due to unique technology
- Great grip and feel, very durable
- Good aging properties relative to competitors
- Excellent processability and aesthetics
- Specialty versions available for unique applications



- Attributes**
- RTP Company offers multiple technology platforms
 - Variety of feel and performance
 - Colorability
 - Excellent bond strength in both insert and multishot processes

Polabond 6041 Series - 55A and 70A TPV based

- Excellent Bonding to PC, ABS, PMMA, RTPU
- Premium polar bonding product
- Excellent chemical resistance at high temps
- Superior weatherability



RTP ACHIEVING ACCEPTABLE ADHESION



RTP ADDITIVE INCORPORATION

Color Conductive Structural Wear FR

PEBA
(RTP 2900)

COPE
(RTP 1500)

TPU
(RTP 1200)
(RTP 2300)

TPV
(RTP 2800)

SBC
(RTP-2700)

2-Shot
(RTP 6000)

TEO
(RTP 2600)

RTP Company's Bread & Butter, Applied to TPE

- Strong market leadership
- Leverage expertise and resources
- Deliver unique solutions & functionality





- | | |
|---------------------|-------------------|
| Precolor anything | CoF modified TPEs |
| Conductive anything | FR TPEs |
| Glass RTPU | ATEX Bondables |
| Wear TPU / COPE | Density modified |



Side Benefit - Uniquely Experienced with all TPE chemistries

- Technical acumen to create custom formulations and alloys
- Culture of customer co-development – create what you NEED

RTP WHAT TO TAKE AWAY FROM TODAY

 <p>RTP 2700 S - SBCs</p>	<ul style="list-style-type: none"> • Common stand-alone TPE; 20A to 90A hardness • 2700 S – higher cost, lower gravity, translucent • 2740 S-xx HF – lower cost, higher gravity, opaque • Bonds to PP; Custom tailoring possible • Temp limited ~100C
 <p>Permaprene™ -TPV Alloys</p>	<ul style="list-style-type: none"> • 2800 B-xx HF - TPV offset in most non-auto applications • 45A to 50D hardness, can be FDA • 2840 B –xx – VA/VE where TPV over-engineered • Good chemical resistance, smooth feel, extrusion
 <p>Nylabond™ Polabond™</p>	<ul style="list-style-type: none"> • 6091 – TPV based PA bonding, lots of auto approvals <ul style="list-style-type: none"> • 125 °C CUT, 55A to 85A, campaign products • 6092 – in development, targeting Powertool market • 6041 – TPV based polar bondable, high performance • 6042-xx HF – Cost effective, excellent bonding
 <p>Specialty</p>	<ul style="list-style-type: none"> • Elastomeric + Any RTP Company core competency • Conductive to "typical" RTP Company sales process

RTP APPLICATION GUIDELINES

- What is the operating temperature range for my application?
- What chemical and/or environmental exposures might there be?
- What are the key performance requirements for the application (beyond just shore hardness)?
- What kind of process will be used to produce final parts?

RTP COLOR • CONDUCTIVE • FILM/SHEET • FLAME RETARDANT
STRUCTURAL • THERMOPLASTIC ELASTOMERS • WEAR

Thank You!

Brian Gumbko
bgumbko@rtppcompany.com
+1 (616) 340-1250

rtppcompany.com • rtp@rtppcompany.com

AP Hueforia Wiman
